


DATA SHEET

Breathing Air Compressor

Bauer Mariner 200-E

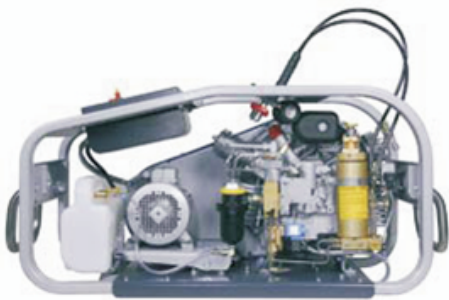

Bauer Mariner 200-E



Automatic Condensate Drain(Optional)



B-TIMER for filter monitoring(Optional)

The driving gear is suitable for short running as well as continuous operation. The 3-/4stage construction and the heavy duty industrial roller bearings guarantee maximum lifetime for all professional applications. The first stage and the high pressure final stage are equipped with high tech polymer piston rings, which proved their outstanding wear and tear properties during several endurance tests in an independent Quality Inspection Center. The maintenance-free rigid oil pump guarantees reliable lubrication.

A newly developed, supra-light aluminium chassis guarantees best protection against corrosion! Inter- and after coolers made of stainless steel resist toughest climatical conditions. The vibration reducing construction of the motor rocker stands for smoothest compressor operation as well as self-restretching of the v-belt.

Cylinder filling from 0 to 200 bar (0 to 3000 psig)

Filling rate for 1 ltr cylinder capacity from 0 to 200 bar is 1 minute (0 to 3000 psig)

Drive: 3 Phase, 4kW

Pressure Bar: Max 330 bar

Dimensions: LxWxH - 129 x 59 x 63cms

Approx Weight: 115kg

www.sabreh2s.com